

Designed for

Microsoft®  
Windows® XP



**Make sure you are using the correct side of the poster.**

Windows users: Follow the steps in order. Do not connect the USB cable until instructed to do so.

See your box for exact contents and system requirements.

**1**

**START HERE**





Windows desktop


- Turn your PC on and wait for the Windows desktop to appear.
- Close any open programs, including virus-checking programs.

**2**

**Install the software first**

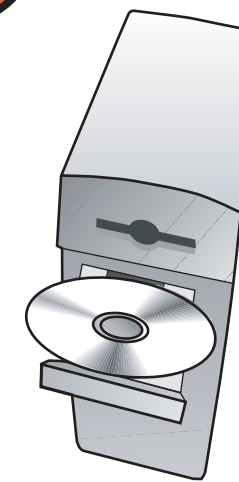


- Insert the HP PSC software CD.
- Follow the onscreen instructions.
- When prompted to set up your device, go to step 3.

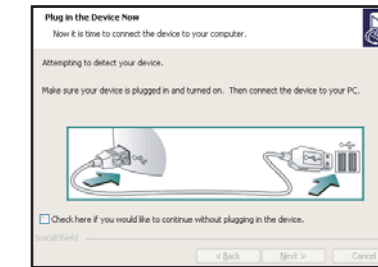

- Notes:**
- If nothing appears on your computer screen after inserting the CD, go to the Windows task bar, click Start, and then choose Run. In the Run dialog box type d:\setup.exe (d= your PC's CD ROM drive letter).
  - You may see the minimum requirements screen first.

**3**

**Attach the cover**

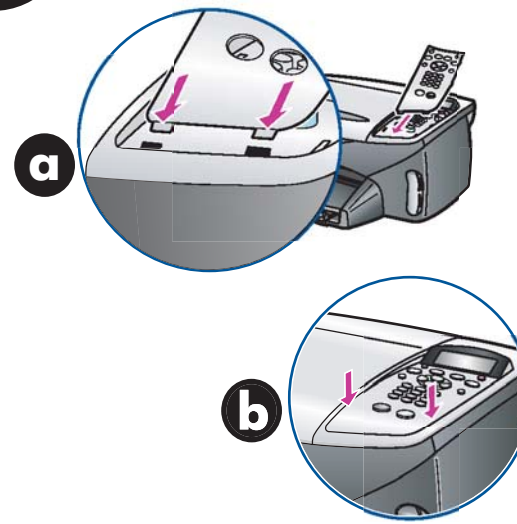


- Insert the two bottom tabs of the cover into the slots on the unit.
- Tilt the cover down and press firmly. Make sure the tabs lock into place and the cover is even with the unit.

**4**

**Remove output tray and load paper**


Use blank white paper to prepare for print alignment.

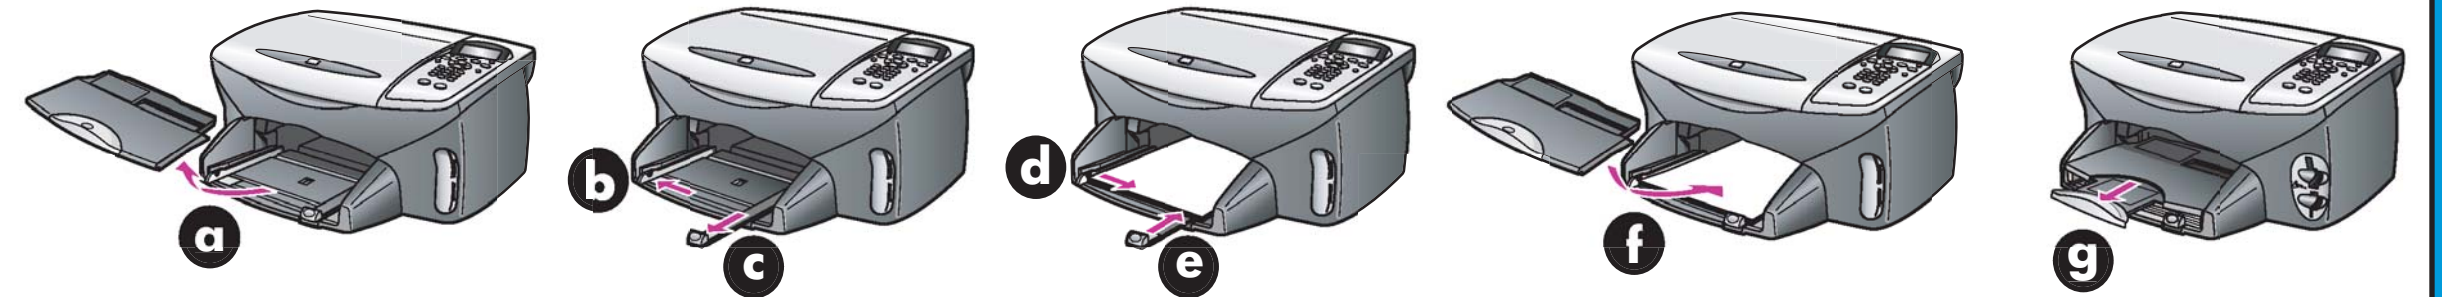

**5**

**Connect the phone cord to wall jack**


- To wall jack
- To phone/modem/office equipment

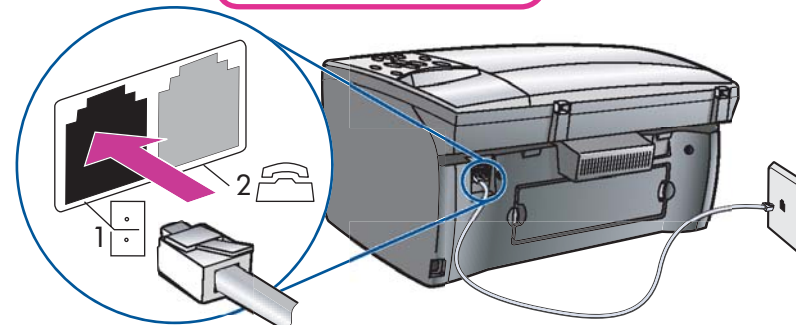

Make sure you have completed steps 1 and 2 before this step.


**6**

**Connect the power cord and USB cable**

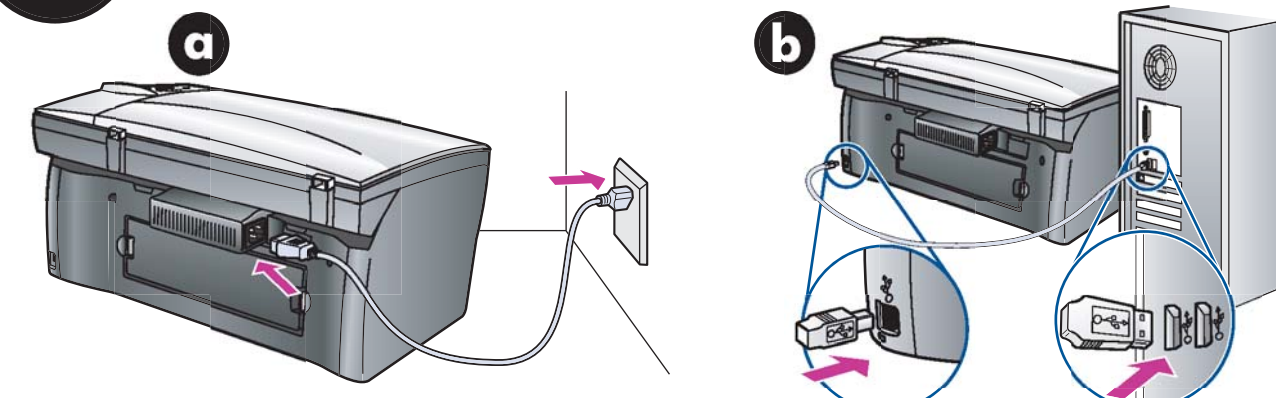

**7**

**Turn on your HP PSC**

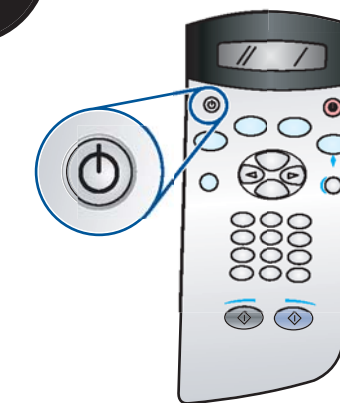


Turn power **On** and wait for display prompt.  
Note: See the reference guide for adjusting the display viewing angle.

**8**


**Insert and align the print cartridges**

Make sure to remove any packing material from inside the unit

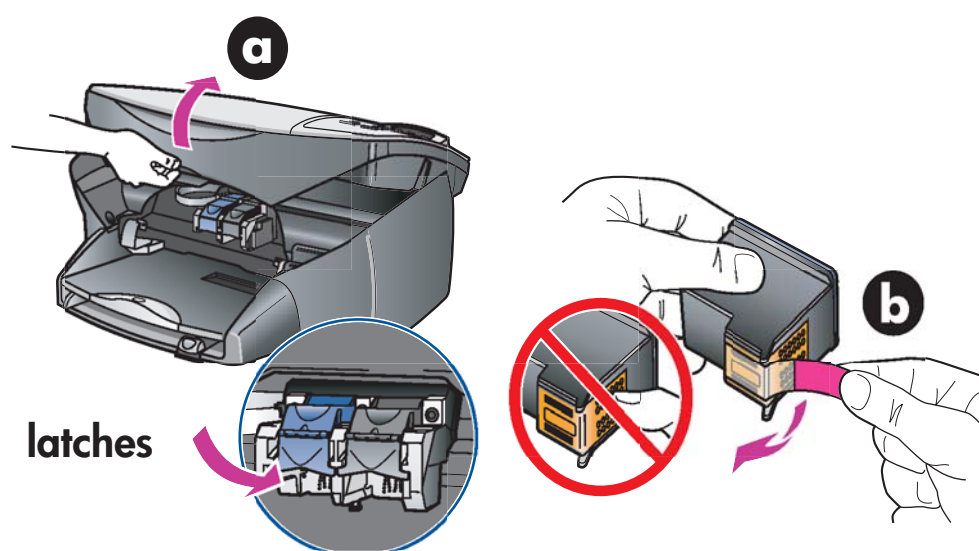


- Lift the print cartridge door up until it catches. Wait for the print cartridge to move to the center. Lift the blue and gray latches.


- Remove the bright pink tape from the print cartridges. Do not touch the gold-colored contacts or retape the cartridges.

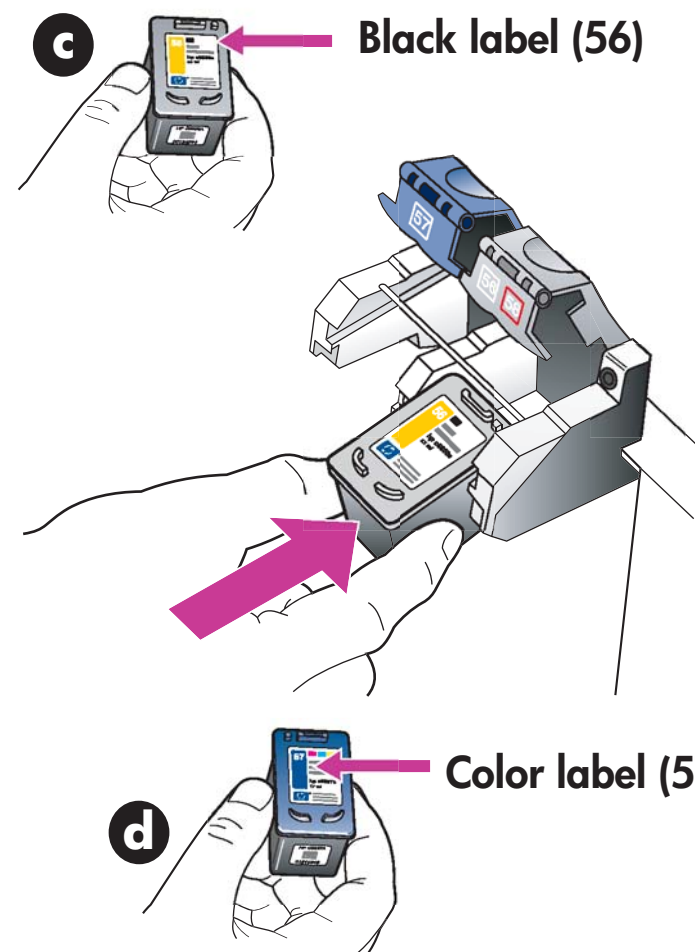

- Hold the black print cartridge with the label on top as shown. Slide the cartridge into the right (gray latch) side of the print carriage.
- Hold the color print cartridge with the label on top as shown. Slide the cartridge into the left (blue latch) side of the print carriage.

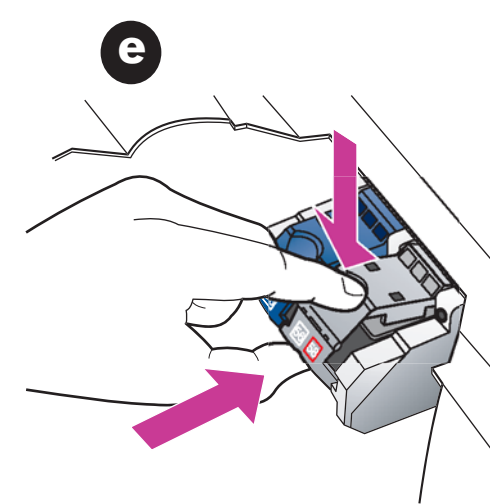

- Pull the end of the gray latch toward you, press down until it stops, and then release. Make sure the latch catches below the bottom tabs. Repeat with blue latch.

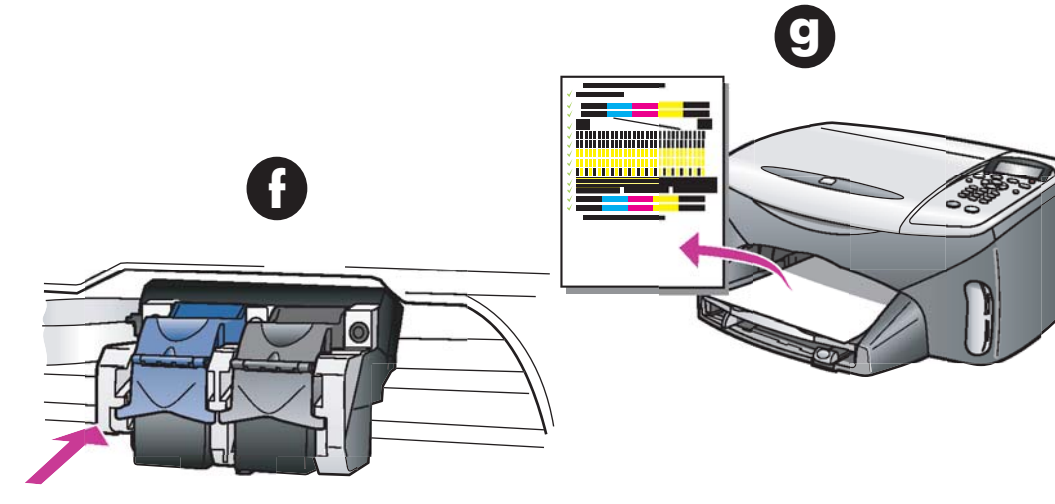


- Make sure both latches are locked into position. Close the door.

- Press Enter to begin alignment. After a page prints, alignment is complete. Discard or recycle this page.

**9**

**Finish software setup**

Make sure the Device Setup complete screen appears. If you do not see this screen, check the reference guide for troubleshooting setup. The software may prompt you to restart.

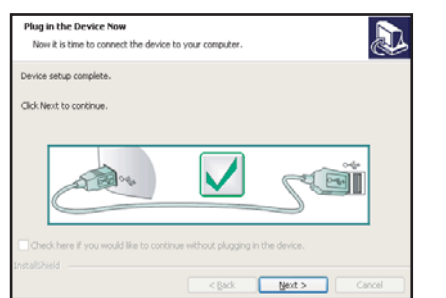


**10**

**Set up faxing**



Make sure your PC is on. Follow the onscreen instructions to enter your name, phone number, and other important settings. See the reference guide for more details. Take the Product Tour to learn about your new HP PSC.





C8654-90179


# Macintosh setup poster

## hp psc 2200 series all-in-one




**Make sure you are using the correct side of the poster.**  
See your box for exact contents and system requirements. Windows users: see other side.

### 1 Attach the cover

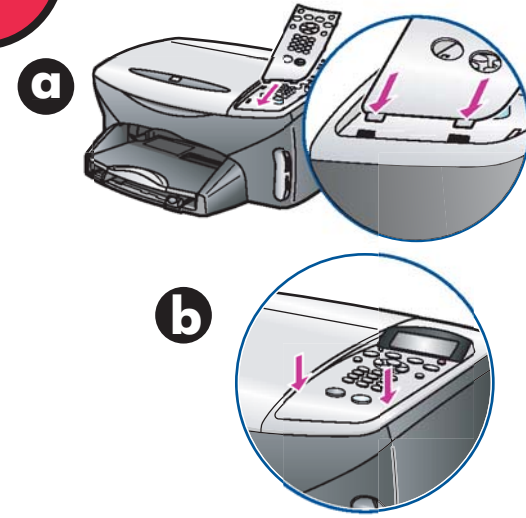



- a** Insert the two bottom tabs of the cover into the slots on the unit.
- b** Tilt the cover down and press firmly. Make sure the tabs lock into place and the cover is even with the unit.

### 2 Remove output tray and load paper

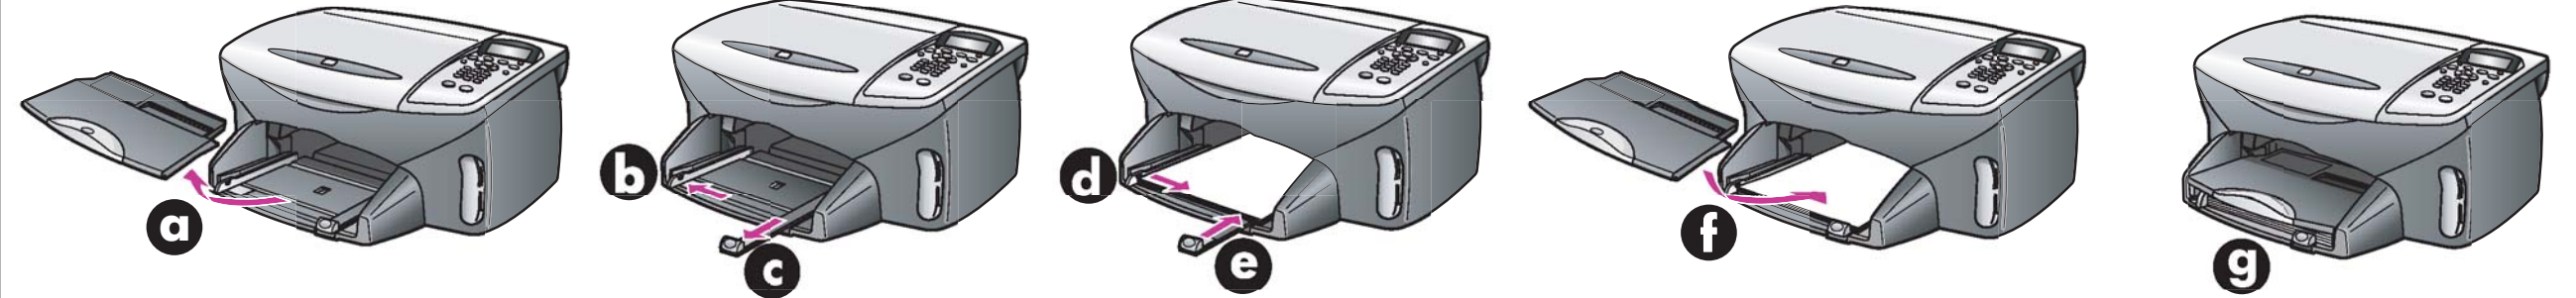



Use blank white paper to prepare for print alignment.

### 3 Connect the USB cable

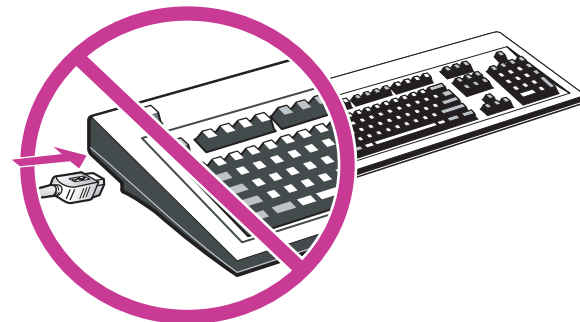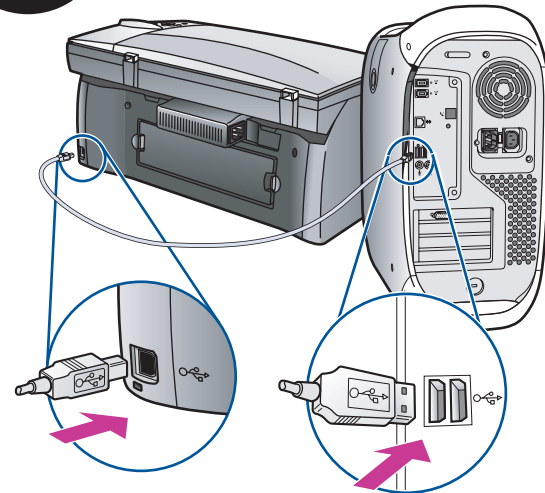


If you have an iMac, your USB port is on the side. Do not connect the HP PSC to a USB port on a keyboard or non-powered USB hub. See reference guide for more details.

### 4 Connect the power cord and phone cord

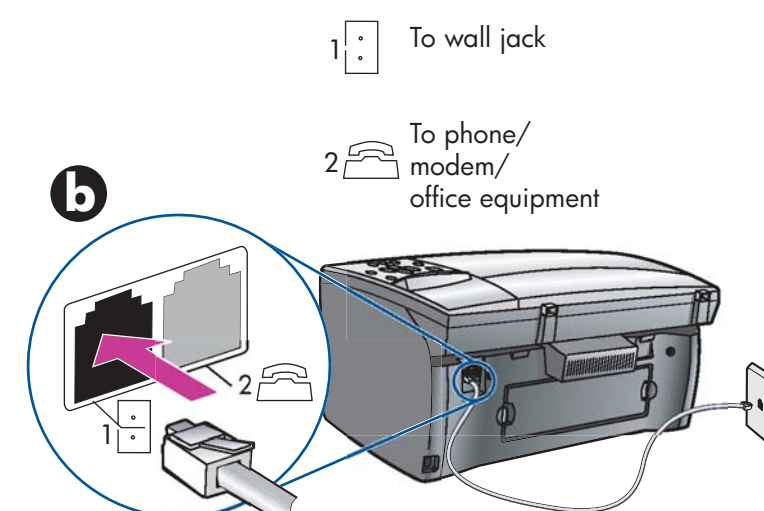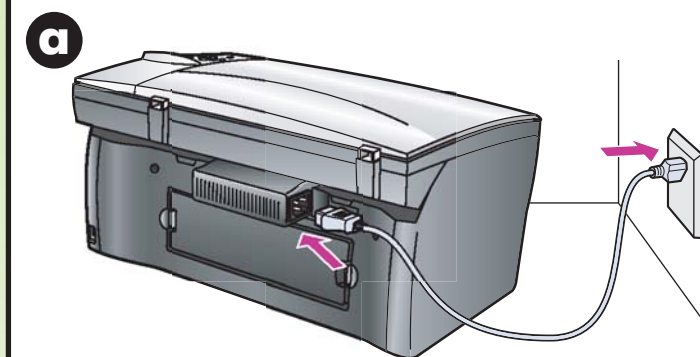


Be sure to insert the phone cord in the left slot on the back of your HP PSC as shown.

### 5 Turn on your HP PSC

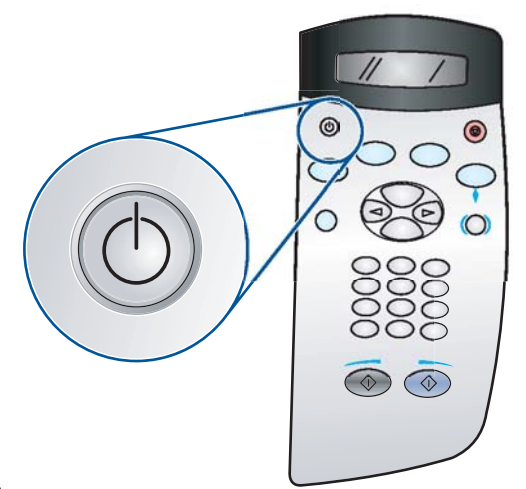


### 6 Insert and align the print cartridges

Make sure to remove any packing material from inside the unit.

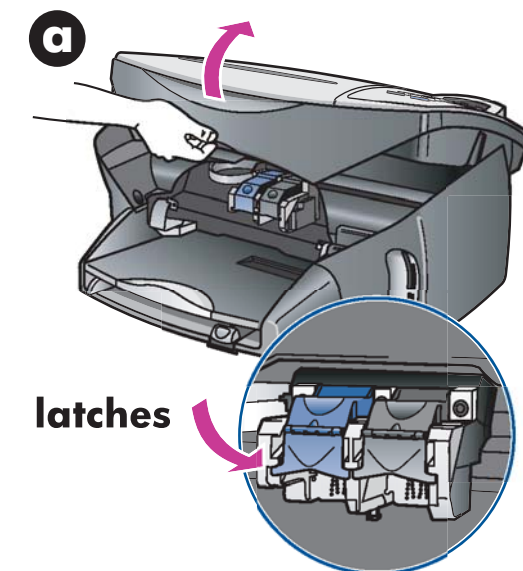


- a** Lift the print carriage door up until it catches. Wait for the print carriage to move to the center. Lift the blue and gray latches.

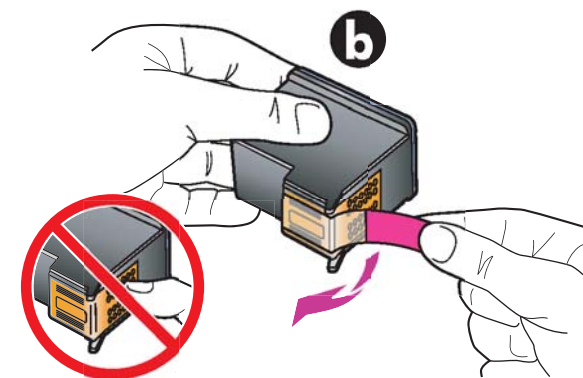

- b** Remove the bright pink tape from the print cartridge. Do not touch the gold-colored contacts or retape the cartridges.




**Black label (56)**

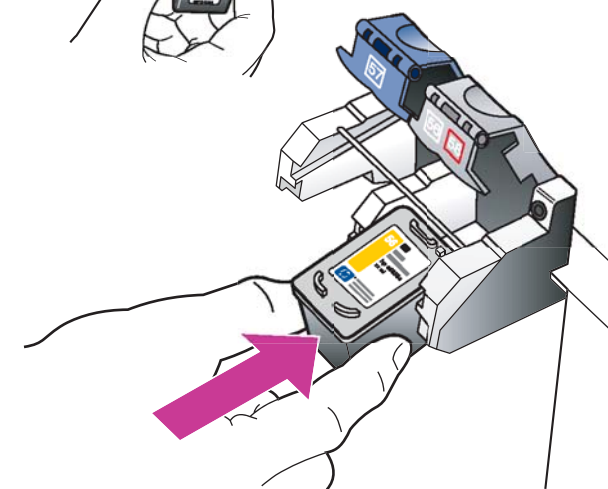


**Color label (57)**


- c** Hold the black print cartridge with the label on top as shown. Slide the cartridge into the right (gray latch) side of the print carriage.
- d** Hold the color print cartridge with the label on top as shown. Slide the cartridge into the left (blue latch) side of the print carriage.

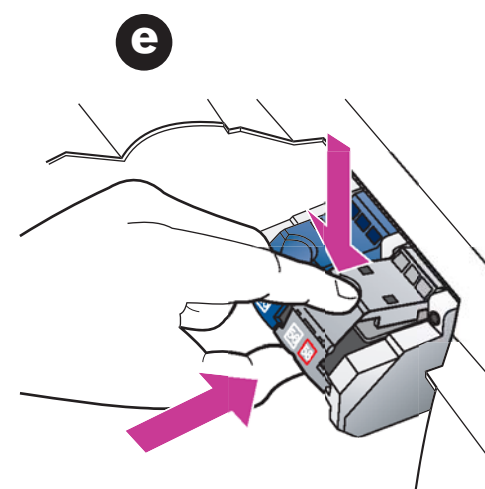

- e** Pull the end of the gray latch toward you, press down until it stops, and then release. Make sure the latch catches below the bottom tabs. Repeat with blue latch.

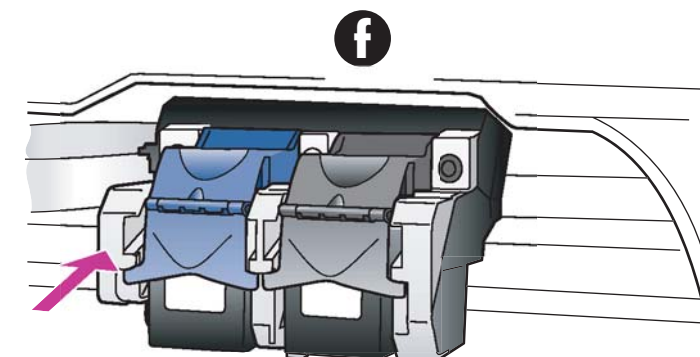


- f** Make sure both latches are locked into position. Close the door.

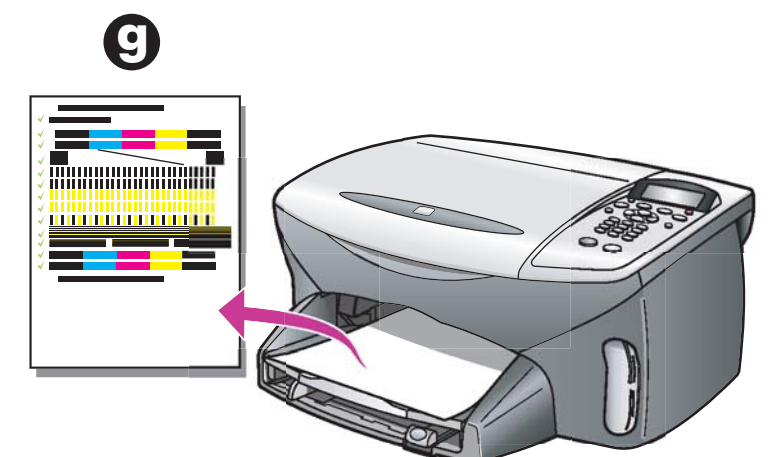


- g** Press Enter to begin alignment. After a page prints, alignment is complete. Discard or recycle this page.

### 7 Install the software

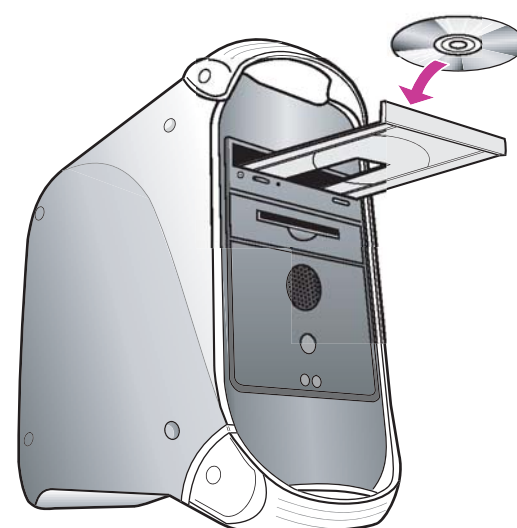

- a** Turn your Macintosh on and wait for your Macintosh to finish starting up. Insert the HP PSC software CD.


- b** Double-click the HP All-in-One Installer icon on your desktop.

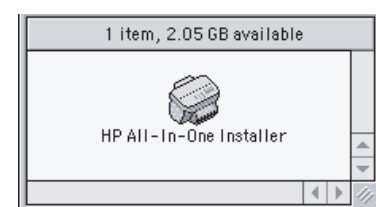

- c** Follow the onscreen instructions. You may have to restart your Macintosh during setup. Be sure to complete the setup assistant.



### 8 Try your new HP PSC

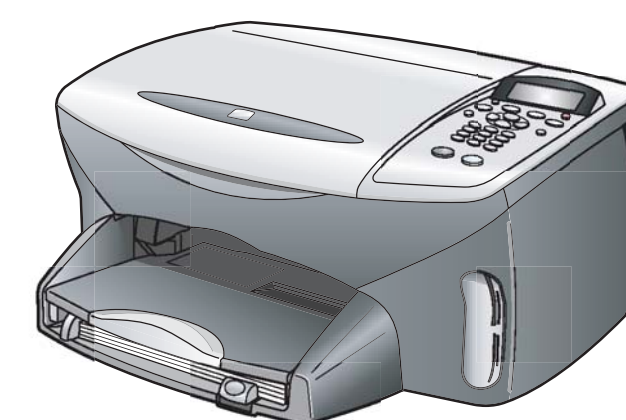

Note: You can adjust the viewing angle of the display. See the reference guide for details.

- Whats next?
- Take the product tour
  - Use the Director
  - Check the reference guide for other ways to get started with your HP PSC.